

---

SAN60, EI30	540 x 790 mm	<b>Fire rate EI30</b>
SAN60, EI30	580 x 1100 mm	<b>Fire rate EI30</b>

---

**Casing:**

<u>outer size</u>	<u>inner size</u>
540 x 790 mm	484 x 742 mm
580 x 1100 mm	524 x 1052 mm

The timber casing with expanding mass protecting against high temperature has:

Case gable (on the hinge side)	32 x 92 mm
Other case sides	24 x 92 mm

**Hatch:**

Frame	timber, 57,8 x 45 mm.
Construction board	9 mm on both sides of the hatch.
Insulation	60 mm rock wool fixed by the steel net
Insulation factor	1,00 W/m <sup>2</sup> C°

**Surface treatment:**

Untreated – can be painted in white-grey finish against the price extension.

**Fire rate:**


Fire rate EI30 in accordance with the Swedish Construction Norms.

**Locking:**

Espagnolette	450 mm long with the rounded sides.
Key/handle	round metal; diameter 9 mm, length 120 mm.
Measurement	square 7-8 mm

**Sealing:**

EPDM rubber seal is mounted between the casing and the trap door.

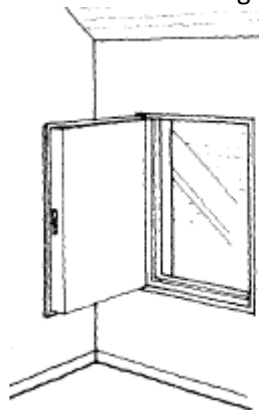

**Others:**

The wall hatch has the hinges placed against each other, which allows to place the door either on the left or right side.

The hinges and lock are placed on the longer side of the hatch.

The hatch is fire rated only against the wall.

**NOTE!!!**

It is possible to produce the wall hatches with the special size with the width: 450-900 mm, height: 495-1400 mm. **Fire rating EI30 is approved for the size up to 680 x 1100 mm.**

**Weight:**

<i>product</i>	<i>product</i>	<i>number per pallet</i>
SAN60, EI30 540x790	13,4 kg	34
SAN60, EI30 580x1100	18,9 kg	17