




SAN 60 / SAN 70

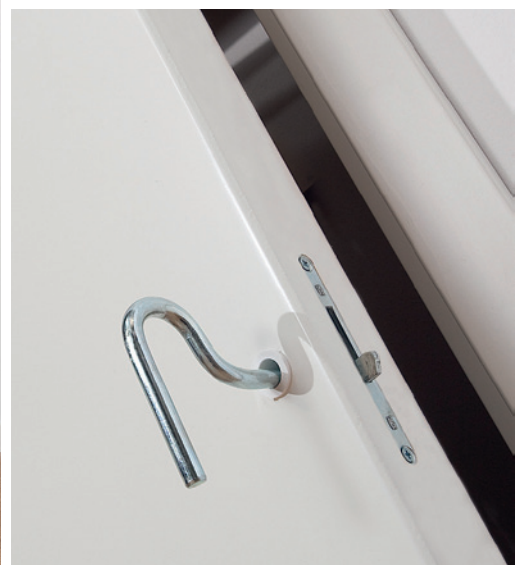

Flexible wall hatch with heavy insulation.

The SAN series' two standard models are specially designed for home environments and provide a unique mix of Swedish design and quality. The pull-out proof hatches are attached to a strong wood frame and designed to withstand all known climates. Hard fibreboard and intermediate cellular plastic insulation for SAN 70 or of fire standard compliant rockwool for SAN 60. Both models are available in two standard sizes and can be switched between right to left side hanging. U-value from 0.41.

A product from




Product	Frame outer measurements (mm)	Inner measurements (mm)	Insulation	U-value* (W/m ² °C)	Fire standard
SAN 70	540 x 790	560 x 810	70mm cellular plastic	0.41	no
SAN 70	580 x 1100	600 x 1120	70mm cellular plastic	0.41	no
SAN 60	540 x 790	560 x 810	60mm rockwool	1.00	EI30/only wall
SAN 60	580 x 1100	600 x 1120	60mm rockwool	1.00	EI30/only wall

SAN 70 and SAN 60 can be custom made in the measurement range: width 495-900mm and height 495-1400mm. Fire standard compliant for measurements of up to 680 x 1100mm. The measurements of the opening in the ceiling construction are 15-20mm larger than the specified outer measurements.

*U-value determination carried out by SP Technical Research Institute of Sweden.

SAN wall hatch

Supplied untreated with 3-point lock or mortice lock (SAN 70 540 x 790). 70mm cellular plastic or 60mm fire standard EI30 compliant rockwool insulation for extreme climates. The fire standard only applies to walls. Supplied with 120mm key.

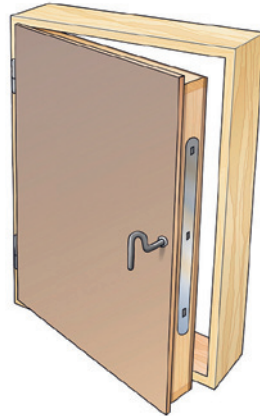

A product from

